

BUTTERFLY VALVE Wafer 300 PSI




Technical Features

- **Connections:** Wafer Type (ANSI Class 125)
- **Sizes:** 2", 5", 10", 12"
- **Approvals:** UL, ULC, FM
- **Maximum Working Pressure:** 300PSI (Max. Test Pressure: 600PSI)
- **Application:** Indoor and Outdoor Use
- Double-Seal Disc; Resilient EPDM Coating
- Factory-Installed Double Supervisory Switch
- Wiring Diagram, Section 2.16



Components	Material	Specification
Body	Ductile Iron	ASTM A536 Nylon-11 Coated
Disc	Ductile Iron	ASTM A536 EPDM Encapsulated
Indicator	Ductile Iron	ASTM A536
Housing	Ductile Iron	ASTM A536
Handwheel	Ductile Iron	ASTM A536
Stem	Stainless Steel	AISI 420
Worm Shaft	Stainless Steel	AISI 410
Shear Pin	Steel	ASTM A510
Gear Segment	Brass	ASTM B584
Housing Gasket	EPDM	EPDM Grade E
O-Ring (All)	EPDM	EPDM Grade E

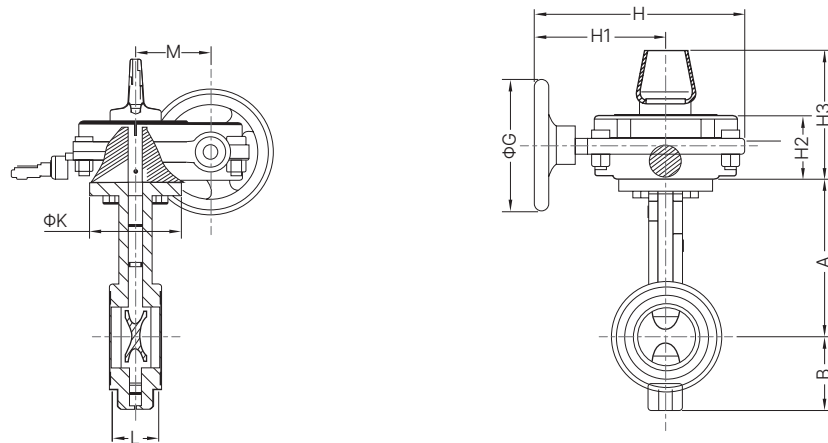

Dimensions

Nominal Pipe Size	L		A		B		G		H		H1		H2		H3		K		M		Weight lbs
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	
10"	2.7	68	10.7	273	7.6	194	7.9	200	11.7	298	8.8	223	3.0	77	4.8	121	4.9	125	2.9	75	62.00
12"	3.1	78	12.2	311	8.8	223	9.8	200	11.7	298	8.8	223	3.0	77	4.8	121	4.9	125	2.9	75	90.00

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	