
data sheet



CPVC SPRINKLER HEAD EXTENSION



- •Pressured Rated to 175 psi @ 150°F (1200kpa @ 65°C)
- •Corrosion Resistant CPVC Material Does Not Sustain Biological Growth
- Superior Flow Characteristics
- •10 Year Limited Warranty

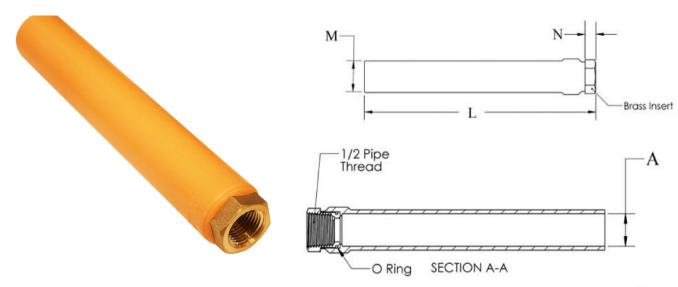



					APPROX
ITEM#	SIZE	М	N	Α	WEIGHT
7510240	1" x 1/2" x 8"	1-19/29"	3/8"	1-1/11"	0.25 lbs
7510241	1" x 3/4" x 8"	1-3/79"	3/8"	43/50"	0.20 lbs

SOCKET DIMENSIONS SCH 40 ASTM F438 SCH 80-ASTM F439 SIZE SCH 40 Minimum SCH 80 Minimum Socket Socket Tolerance Ent. A Bottom B Socket Length C Socket Length C 3/4" 1.058 1.046 ±0.004 0.719 1.000

1" 1.325 1.310 ±0.005 0.875 1.125

The information contained herein is produced in good faith and is believed to be reliable but is for guidance only. ARGCO and its agents cannot

assume liability or responsibility for results obtained in the use of its product by persons whose methods are outside or beyond our control. It is the user's responsibility to determine the suitability of any of the products, methods of use, or preparation prior to use, mentioned in our literature. It is the user's responsibility to observe and adapt such precautions as may be advisable for the protection of personnel and property in the handling and use of any of our products.