


data sheet



GUARANTEED



CPVC FITTING - TEE SOCKET X SOCKET X SOCKET

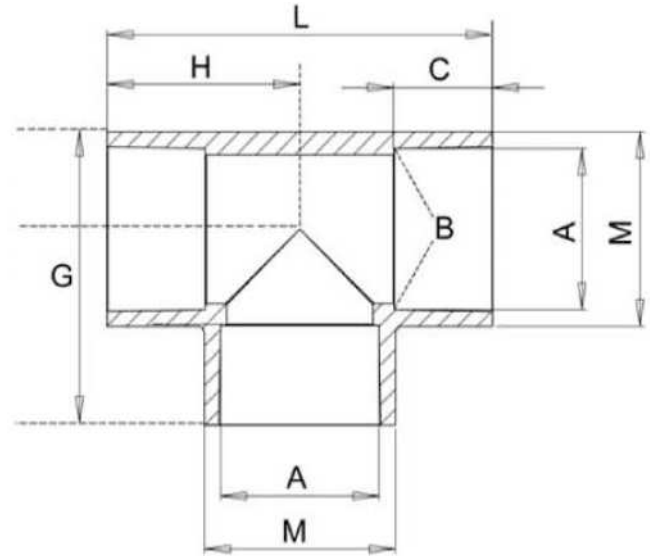


- Pressured Rated to 175 psi @ 150°F (1200kpa @ 65°C)
- Corrosion Resistant CPVC Material Does Not Sustain Biological Growth
- Superior Flow Characteristics
- 10 Year Limited Warranty



Part Number	Size	G	H	L	M	Approx Wt. (Lbs.)
CPT-34	3/4	28/43	1-31/68	2-7/8	1-5/16	0.11
CPT-1	1	3/4	1-5/8	3-3/16	1-5/8	0.19
CPT-114	1-1/4	15/16	1-7/8	3-25/32	1-31/32	0.28
CPT-112	1-1/2	1-15/79	2-25/44	5-1/8	2-11/32	0.65
CPT-2	2	1-32/93	2-15/16	5-7/8	2-7/8	1.00
CPT-212	2-1/2	1-23/32	3-1/2	7	3-15/32	1.60
CPT-3	3	2-1/16	3-15/16	7-7/8	4-3/16	3.02

SOCKET DIMENSIONS



SCH 40 ASTM F438
SCH 80-ASTM F439

SIZE	Socket Ent. A	Socket Bottom B	Tolerance	SCH 40 Minimum Socket Length C	SCH 80 Minimum Socket Length C
3/4"	1.058	1.046	±0.004	0.719	1.000
1"	1.325	1.310	±0.005	0.875	1.125
1-1/4"	1.670	1.655	±0.005	0.938	1.250
1-1/2"	1.912	1.894	±0.006	1.094	1.375
2"	2.387	2.369	±0.005	1.156	1.500
2-1/2"	2.899	2.868	±0.007	1.75	1.750
3"	3.516	3.492	±0.008	1.875	1.875

**FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM**