



DUCTILE IRON BLIND FLANGE FITTING

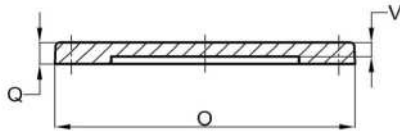

BDF

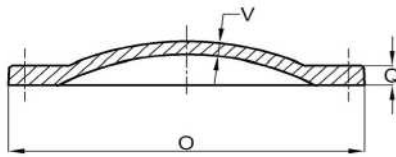

DTF

MATERIAL: Ductile Iron ASTM A536 Grade 60-42-10, 65-45-12 or 70-50-05.

250 PSI Water Working Pressure for Ductile Iron sizes 2" - 48"

TESTING: In accordance with ANSI / AWWA C110 / A21.10 where applicable.

Other items are in accordance with manufacturer's standards.

LAYING LENGTH: In accordance with ANSI / AWWA C110 / A21.10 where applicable.

CEMENT LINING: In accordance with ANSI / AWWA C104 / A21.4

COATING: Tar coated (bituminous) inside in accordance with ANSI / AWWA C104 / A21.04

Red Primer Outside.

For special conditions, other types of coatings and linings are available.

Please specify when ordering.

APPROVALS: 2"-16" Underwriters Laboratories listed and Factory Mutual Approved.

STANDARDS: ANSI / AWWA C110 / A21.10 Where applicable.



BLIND FLANGES

Size	Weight	DUCTILE IRON		O	Q	V
		Solid	Tapped			
2		BDF2		6.00	0.62	0.31
2.5		BDF25		7.00	0.69	0.48
3	9	BDF3	DTF3	7.50	0.75	0.69
4	14	BDF4	DTF4	9.00	0.94	0.88
6	24	BDF6	DTF6	11.00	1.00	0.94
8	38	BDF8	DTF8	13.50	1.12	1.06
10	59	BDF10	DTF10	16.00	1.19	1.12
12	76	BDF12	DTF12	19.00	1.25	0.81
14	110	BDF14	DTF14	21.00	1.38	0.88
16	145	BDF16	DTF16	23.50	1.44	1.00
18	185	BDF18	DTF18	25.00	1.56	1.06
20	217	BDF20	DTF20	27.50	1.69	1.12
24	370	BDF24	DTF24	32.00	1.88	1.25
30	500	BDF30	DTF30	38.75	2.12	1.44
36	790	BDF36	DTF36	46.00	2.38	1.62
42	1,175	BDF42	DTF42	53.00	2.62	1.81
48	1,585	BDF48	DTF48	59.50	2.75	2.00
54	2,600	BDF54	DTF54	66.25	3.00	2.25
60		BDF60		73.00	3.12	2.50
64		BDF64		80.00	3.38	2.56
72		BDF72		86.50	3.50	2.56
96		BDF96		113.25	4.25	3.20

The information contained herein is produced in good faith and is believed to be reliable but is for guidance only. ARGCO and its agents cannot assume liability or responsibility for results obtained in the use of its product by persons whose methods are outside or beyond our control. It is the user's responsibility to determine the suitability of any of the products, methods of use, or preparation prior to use, mentioned in our literature. It is the user's responsibility to observe and adapt such precautions as may be advisable for the protection of personnel and property in the handling and use of any of our products.

**FOR MORE INFORMATION CALL ARGCO AT 800-854-1015
OR LOG ONTO ARGCO.COM**