

GROOVED END CAP, END CAP WITH HOLE

Model 005, 005H



ARGCO Model 005H End Cap with Hole is an ideal transition fitting when a large reduction is required such as 6"×1", 4"×1" etc. The Model 005H can be used as an alternative to expensive swaged nipples.



Pipe Material

- Carbon steel, Schedule 10, Schedule 40.
For use with alternative materials and wall thicknesses please contact ARGCO.

Maximum Working Pressure

- Up to 300 psi/20 bar

Function

- Joins carbon steel pipe.
- Provides a rigid pipe joint designed to restrict axial or angular movement.

CERTIFICATIONS/LISTINGS

Underwriters Laboratories, Underwriters Laboratories Canada, Factory Mutual.

SPECIFICATIONS - MATERIAL

Housing Sections: Ductile Iron conforming to ASTM A 536, Grade 65-45-12.

Housing Coating:



Standard: Orange Enamel

Available: Hot Dipped Galvanized

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	

GROOVED END CAP, END CAP WITH HOLE

Model 005, 005H

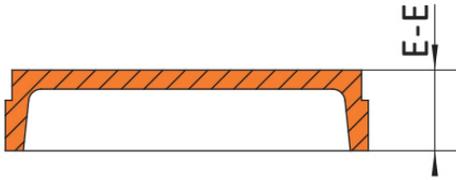

Item #	Nominal Size in/mm	Pipe O.D. in/mm	Max Working Pressure psi/Bar	E-E inches mm
7010125	1-1/4	1.669	300	0.94
	32	42.4	20	2.38
7010126	1-1/2	1.9	300	0.94
	40	48.3	20	2.38
7010127	2	2.375	300	0.94
	50	60.3	20	2.38
7010128	2-1/2	3	300	0.94
	65	76.1	20	2.38
7010129	3	3.5	300	0.94
	80	88.9	20	2.38
7010130	4	4.25	300	1.00
	100	108	20	25.4
7010131	5	5.25	300	1.00
	125	133	20	25.4
7010132	6	6.5	300	1.00
	150	165.1	20	25.4
7010133	8	8.625	300	1.19
	200	219.1	20	30.2
7010134	10	10.75	300	1.19
	250	273	20	30.2
7010135	12	12.75	300	1.19
	300	323.9	20	30.2

Item #	Nominal Size in/mm	Pipe O.D. in/mm	Max Working Pressure psi/Bar	E-E inches mm
7010136	2-1/2 x 1	2.875 x 1.327	300	0.94
	65 x 25	73 x 33.7	20	23.8
7010136A	2 x 1	2.375 x 1.327	300	0.94
	50 x 25	60.3 x 33.7	20	23.8
7010137	3 x 1	3.5 x 1.327	300	0.94
	80 x 25	88.9 x 33.7	20	23.8
7010138	4 x 1	4.5 x 1.327	300	1.00
	100 x 25	114.3 x 33.7	20	25.4
7010139	5 x 1			
7010140	6 x 1	6.5 x 1.327	300	1.00
	150 x 25	165.1 x 33.7	20	25.4
7010141	8 x 1			
7010142	10 x 1			
7010143	12 x 1			

User Responsibility for Product Selection and Suitability

Each user bears final responsibility for making a determination as to the suitability of ARGCO products for a particular end-use application, in accordance with industry standards and project specifications, and the applicable building codes and related regulations as well as ARGCO performance, maintenance, safety, and warning instructions. Nothing in this or any other document, nor any verbal recommendation, advice, or opinion from any ARGCO employee, shall be deemed to alter, vary, supersede, or waive any provision of Allied Rubber and Gasket Company's standard conditions of sale, installation guide, or this disclaimer.

Note

All products to be installed in accordance with current ARGCO installation/assembly instructions. ARGCO reserves the right to change product specifications, designs and standard equipment without notice and without incurring obligations.

Installation

Reference should always be made to the ARGCO installation instructions of the product you are installing.

Warranty

Refer to the Warranty section of the current Price List or contact ARGCO for details.



VIZA.EX26460 Fittings, Grooved and Plain End

[Page Bottom](#)

Fittings, Grooved and Plain End

[See General Information for Fittings, Grooved and Plain End](#)

ALLIED RUBBER & GASKET CO INC, DBA ARGCO

EX26460

5400 S 66th St
Fort Smith, AR 72903 USA

The following fittings are intended for use with Allied Rubber & Gasket Co Inc, DBA ARGCO (EX26459) Listed rubber gasketed fittings.

Grooved end

Model	Type	Size In.	Rated Pressure (psig)
002L	90 std. elbow	1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5, 6-1/4OD, 6-1/2OD, 6, 8, 10, 12	300
002	90 short elbow	2, 2-1/2, 3OD, 3, 4, 6-1/2OD, 6, 8	300
002D	Drain elbow	1-1/2, 2, 2-1/2, 3, 4, 6-1/2OD, 6	300
006RT	Reducing elbow	1-1/4x1/2, 3/4, 1; 1-1/2x1/2, 3/4, 1; 2x1/2, 3/4, 1	300
003	45 elbow	1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5, 6-1/4OD, 6-1/2OD, 6, 8, 10, 12	300
0031	22.5 elbow	1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5, 6-1/4OD, 6-1/2OD, 6, 8, 10, 12	300
004L	Std. tee	1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5, 6-1/4OD, 6-1/2OD, 6, 8, 10, 12	300
004	Short tee	2, 2-1/2, 3OD, 3, 4, 6-1/2OD, 6, 8	300
005	Cap	1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5, 6-1/4OD, 6-1/2OD, 6, 8, 10, 12	300
005WH	End cap with hole	1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/2OD, 5, 6-1/2OD, 6, 8, 10, 12	300
008	Concentric reducer	1-1/2x1-1/4; 2x1-1/4, 1-1/2; 2-1/2x1-1/4, 1-1/2, 2; 3ODx1-1/4, 1-1/2, 2; 3x1-1/4, 1-1/2, 2, 2-1/2, 3OD; 4x1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3; 5-1/4ODx1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4; 5-1/2OD x 1-1/4, 1-1/2, 2, 3OD, 3, 4, 5x1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4; 6-1/4ODx1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4-1/4OD, 4, 5-1/4OD, 5; 6-1/2ODx1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5; 6x1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5; 8x1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3, 4, 5-1/4OD, 5, 6-1/4OD, 6-1/2OD, 610x4, 5-1/2OD, 5, 6-1/4OD, 6-1/2OD, 6, 12x4, 5-1/2OD, 5, 6-1/4OD, 6-1/2OD, 6, 8, 10	300
009	Concentric reducer, threaded	1-1/4x1/2, 3/4, 1; 1-1/2x1/2, 3/4, 1, 1-1/4; 2x1/2, 3/4, 1, 1-1/4, 1-1/2; 2-1/2x1/2, 3/4, 1, 1-1/4, 1-1/2, 2; 3ODx1/2, 3/4, 1, 1-1/4, 1-1/2, 2; 3x1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3OD; 4x1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3; 5-1/4ODx1/2, 3/4, 1, 1-1/4, 1-1/2, 2, 2-1/2, 3OD, 3;	300

Pipe Fittings

These fittings are suitable for interconnecting piping, valves and other components in both wet and dry automatic sprinkler systems. Installation should be according to applicable sprinkler system fabrication rules. These rules limit the minimum size of sprinkler piping to 1 in., nominal. FM Approved pipe fittings of smaller sizes are intended for use as valve trim, gauge connections, and for other peripheral service. The water flow path of the sprinkler system cannot be designed using smaller sizes than 1 in., nominal. Unless otherwise noted in the listing, these fittings have 175 psi (1205 kPa) rated working pressure.

Threaded connections on fittings can be made to FM Approved threadable thinwall pipe or to Schedule 40 pipe. Refer to the "Steel Pipe" listings for a summary of the various types of FM Approved steel pipe suitable for threading or grooving."

The fittings manufacturer's installation instructions must be observed in all cases. When connections are made to FM Approved pipe, the pipe manufacturer's installation instructions must also be followed.

Unless otherwise stated below, the maximum ambient temperature to which these fittings should be subjected is 225°F (107°C).

Pipe Fittings

Allied Rubber, Pipe Fittings

<i>Product Designation</i>	<i>Fitting Description</i>	<i>Nominal Pipe Size, in./ mm</i>	<i>Rated Working Pressure, psi (kPa)</i>	<i>Remarks</i>
002	Short Radius 90° Elbow	1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8 45, 57, 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
002L	90° Elbow	1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8, 10, 12 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
002D	90° Drain Elbow	1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
003	45° Elbow	1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8, 10, 12 57, 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
0031	22.5° Elbow	1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8 45, 57, 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
004	Short Radius Equal Tee	1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
004L	Long Radius Equal Tee	1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6, 8, 10, 12 76, 108, 133, 140, 159, 165 mm	300 (2070)	—
005	Cap Grooved	1, 1-1/4, 1-1/2, 2, 2-1/2, 3, 4, 5, 6 57, 76, 108, 133, 140, 159, 165 mm	300 (2070)	—