



data sheet

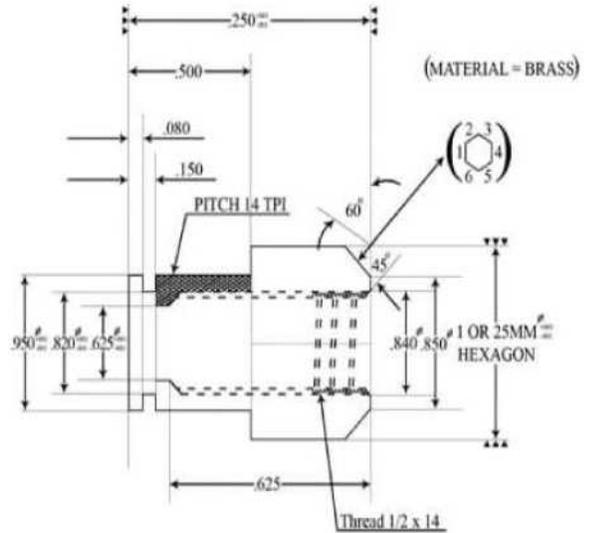


CPVC FITTING - FEMALE HEAD ADAPTER

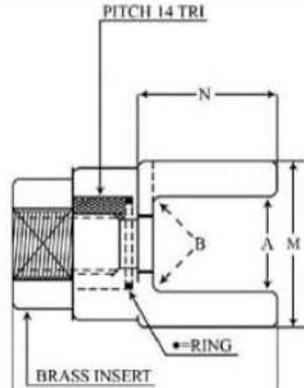

- Pressured Rated to 175 psi @ 150°F (1200kpa @ 65°C)
- Corrosion Resistant CPVC Material Does Not Sustain Biological Growth
- Superior Flow Characteristics
- 10 Year Limited Warranty

PART	SIZE	L	M	N	Wall Thickness	Approx Wt. (Lbs.)
CPFHA-3412B	3/4 x 1/2	2-11/78	N/A	N/A	0.365	0.20
CPFHA-112B	1 x 1/2	2-6/19	N/A	N/A	0.396	0.15
CPFHA-3412P	3/4 x 1/2	2-1/25	1.046 ±0.004	1.000 ±0.004	0.396	0.13
CPFHA-112P	1 X 1/2	1-8/11	1.310 ±0.004	1.051 ±0.004	0.396	0.12

SOCKET DIMENSIONS



SCH 40 ASTM F438
SCH 80-ASTM F439

SIZE	Socket Ent. A	Socket Bottom B	Tolerance	SCH 40 Minimum Socket Length C	SCH 80 Minimum Socket Length C
3/4"	1.058	1.046	±0.004	0.719	1.000
1"	1.325	1.310	±0.005	0.875	1.125
1-1/4"	1.670	1.655	±0.005	0.938	1.250
1-1/2"	1.912	1.894	±0.006	1.094	1.375
2"	2.387	2.369	±0.005	1.156	1.500
2-1/2"	2.899	2.868	±0.007	1.75	1.750
3"	3.516	3.492	±0.008	1.875	1.875

FOR MORE INFORMATION CALL ARGCO AT 1-800-854-1015
OR LOG ONTO WWW.ARGCO.COM