


WALL INDICATOR POST




Technical Features

- Remove the Top Section from the top indicator post assembly
- Set the OPEN and SHUT targets for appropriate size
- Depressurize and drain the piping system before attempting to install, remove, adjust, or maintain piping products
- Approvals: UL, ULC, FM
- Weight: 90.7 lbs

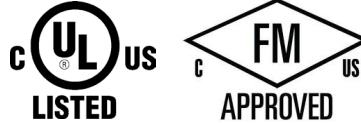

VALVE SIZE	ITEM #	DIMENSION A	DIMENSION B	EXT. ROD LENGTH
4" - 12"	6520281	9.56"	13.63"	3"

COMPONENTS	MATERIAL
Eye Bolt	Carbon Steel ASTM A307B
Hex Nut	Carbon Steel ASTM A307B
Washer	Carbon Steel ASTM A570 Gr. 33
Handwheel	Ductile Iron ASTM A536 Gr. 65-45-12
Hex Cap Screw	Carbon Steel ASTM A307B
Square Nut	Carbon Steel ASTM A307B
Snap Ring	Stainless Steel AISI 1066
Cover	Cast Iron ASTM A126 Class B
Operating Nut	Bronze ASTM B62 C83600
Operating Nut	Stainless Steel AISI 304
Target Carrier Nut	Bronze ASTM B62 C83600
Target Carrier Nut	Stainless Steel AISI 304
Window Glass	Plexiglass
Gasket	PTFE
Hex Nut	Carbon Steel ASTM A307B
Plug	Malleable Iron
Target	Cast Aluminum
Hex Cap Screw	Carbon Steel ASTM A307B
Hex Nut	Carbon Steel ASTM A307B
Body	Cast Iron ASTM A126 Class B
Stem	Carbon Steel ASTM 1045
Crane Coupling	Ductile Iron ASTM A536 Gr. 65-45-12
Cotter Pin	Stainless Steel AISI 304

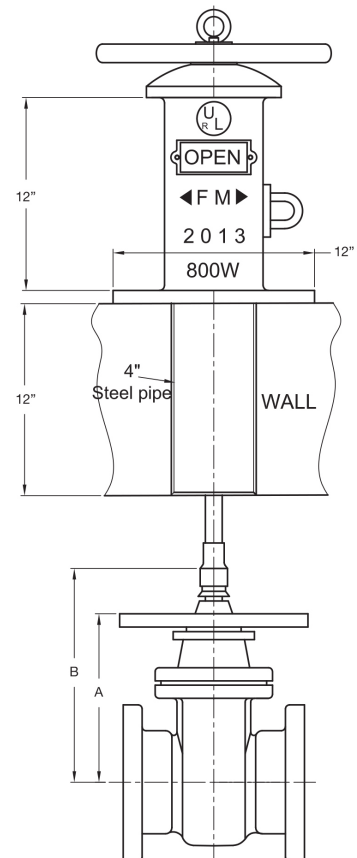

Used for applications where a valve is installed behind a wall

The Wall Flange of the wall type indicator post is tapped for 4" schedule 40 steel pipe which extends through the wall

Handwheel Operation