

BRONZE BUTTERFLY VALVE - THREADED


"BUTTERBALL"





Technical Features:

- Connections: Threaded Ends (ANSI / AWWA C606)
- Sizes: 1", 1-1/2", 2", 2-1/2"
- Approvals: UL, ULC, FM
- Max Working Pressure: 300 psi (Max. Test Pressure: 300 psi)
- Application: Indoor and Outdoor Use
- Factory Installed Double Supervisory Switch

[CLICK HERE TO PURCHASE
THREADED BRONZE BUTTERFLY VALVES](#)

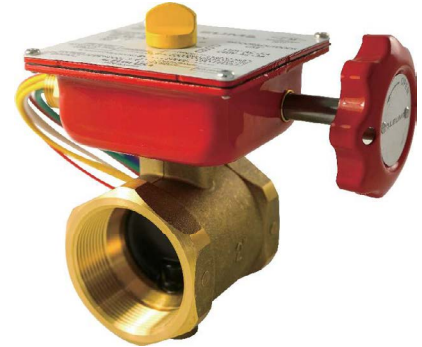

Component	Material	Specification
Body	Bronze	ASTM B505
Disc	Aluminum Bronze	ASTM B548
Disc Encapsulation	EPDM Rubber	ASTM D2000
Indicator	Brass	ASTM B16
Housing	Steel-powdercoated	ASTM A619
Handwheel	Steel-powdercoated	ASTM A619
Stem	Stainless Steel	ASTM A564 15-5PH

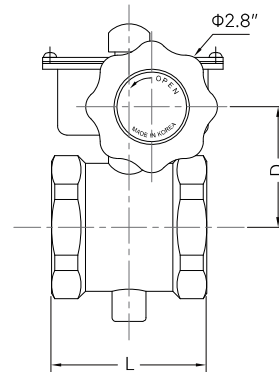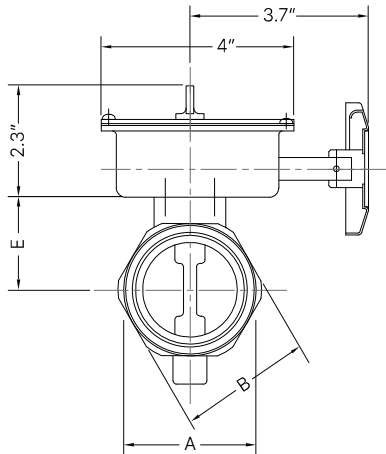

Dimensions

Nominal Pipe Size	L		A		B		D		E		Weight lbs
	in	mm	in	mm	in	mm	in	mm	in	mm	
1"	2.1	54.0	1.7	43.7	1.6	39.7	2.0	52.0	1.5	37.0	3.30
1¼"	2.6	67.0	2.1	54.0	1.9	49.0	2.2	56.0	1.6	41.0	4.00
1½"	2.9	73.0	2.4	60.0	2.2	56.0	2.3	59.0	2.4	61.3	4.00
2"	3.2	82.4	3.0	76.0	2.8	70.0	2.5	64.0	1.9	49.0	5.00
2½"	4.1	104.0	3.5	90.0	3.3	84.0	2.7	69.5	2.1	54.5	7.00

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	

BRONZE BUTTERFLY VALVE - GROOVED



"BUTTERBALL"





Technical Features:

- Connections: Grooved Ends (ANSI / AWWA C606)
- Sizes: 1", 1-1/2", 2", 2-1/2", 3"
- Approvals: UL, ULC, FM
- Max Working Pressure: 300 psi (Max. Test Pressure: 300 psi)
- Application: Indoor and Outdoor Use
- Factory Installed Double Supervisory Switch

[CLICK HERE TO PURCHASE
GROOVED BRONZE BUTTERFLY VALVES](#)

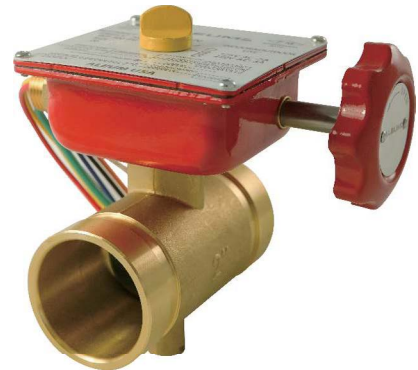

Components	Material	Specification
Body	Bronze	ASTM B505
Disc	Aluminum Bronze	ASTM B548
Disc Encapsulation	EPDM Rubber	ASTM D2000
Indicator	Brass	ASTM B16
Housing	Steel-powdercoated	ASTM A619
Handwheel	Steel-powdercoated	ASTM A619
Stem	Stainless Steel	ASTM A564 15-5PH

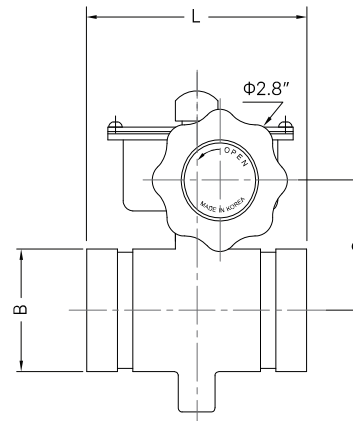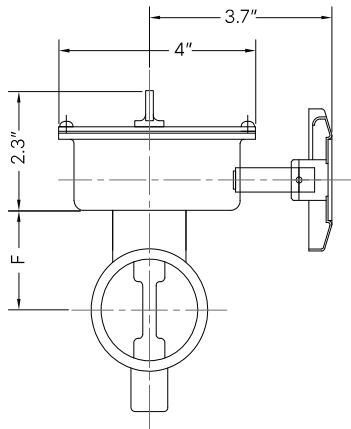

Dimensions

Nominal Pipe Size	L		B		F		G		Weight lbs
	in	mm	in	mm	in	mm	in	mm	
1"	3.4	86	1.3	33.7	1.5	37	2.0	52	3.00
1 1/4"	3.9	99	1.7	42.4	1.6	41	2.2	56	4.00
1 1/2"	4.1	104	1.9	48.3	1.7	44	2.3	59	4.00
2"	4.5	114	2.4	60.3	1.9	49	2.5	64	5.00
2 1/2"	4.5	114	2.9	73.0	2.4	60	2.9	75	6.00
3"	4.5	114	3.5	88.9	2.8	70	3.9	98.5	8.00

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	