

STANDARD ANGLE HOSE VALVE
2.5" FEMALE INLET X MALE HOSE THREAD OUTLET



Technical Features:

- Heavy Duty 2-1/2" (65 mm) angle hose valve
- 300 lbs (2068 kPa) pressure tested
- Lightweight cast brass body
- Forgeline Bonnett and Seat Assembly
- UL/ULC listed and FM Approved.



FINISH: Cast Brass

OPTIONS: Polished Brass, Cast Chrome, Polished Chrome

HOSE THREADS AVAILABLE:

CSA, BCT, WCT, QST, NSST, NPSH, NST, Louisville, Cleveland, Chicago, Pittsburgh, New Cincinnati, New York Corp., New York Fire Department, Richmond, Raleigh

ARGCO ITEM # [6510010A](#)


ALSO AVAILABLE:

[1.5" F \(NPT\) x 1.5 M \(NST\) ANGLE HOSE VALVE](#)

[1.5" F \(NPT\) x 1.5 M \(NPT\) ANGLE HOSE VALVE](#)

[2.5" F \(GROOVE\) x 2.5 M \(NST\) ANGLE HOSE VALVE](#)

[REPLACEMENT HANDLE FOR 2.5" HOSE VALVE](#)

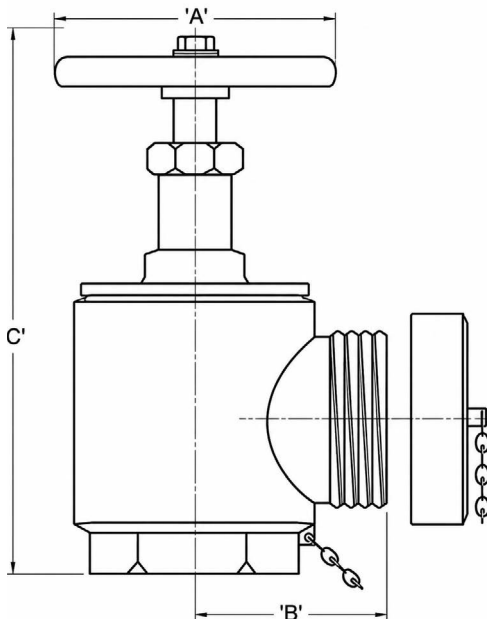

DIMENSIONS:

A=5" (125mm)
 B=3 3/16" (79mm)
 C=11" (OPEN) (275mm)
 C=9 1/4" (CLOSED) (231mm)

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	