

SPLIT RING PIPE HANGERS HINGED AND TWO-SCREW




Designed for non-insulated stationary pipe lines in either a horizontal or vertical position.

- Malleable Iron with Electro-Galvanized Finish


Complies with Federal Specification A-A-1192A (Type 12) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 12) which supersedes ANSI/MSS SP-69.

HINGED SPLIT RING HANGER

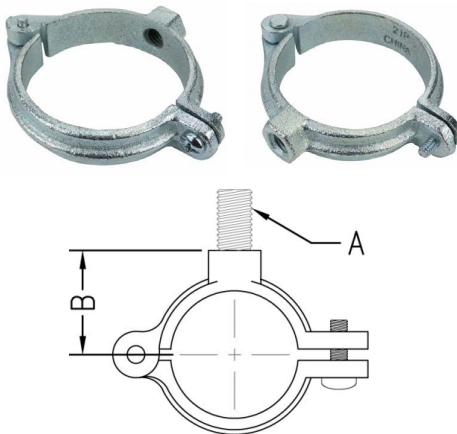

Item #	Pipe Size	Rod Size	B	Maximum Load Capacity (LBS)	Weight (LBS)
2530246-3/8	3/8"	3/8"-16	13/16"	180#	0.13
2530246-1/2	1/2"	3/8"-16	7/8"	180#	0.14
2530246-3/4	3/4"	3/8"-16	1"	180#	0.16
2530246-1	1"	3/8"-16	1-1/8"	180#	0.18
2530246-1-1/4	1-1/4"	3/8"-16	1-5/16"	180#	0.22
2530246-1-1/2	1-1/2"	3/8"-16	1-7/16"	180#	0.38
2530246-2	2"	3/8"-16	1-11/16"	180#	0.44
2530246-2-1/2	2-1/2"	1/2"-13	2-1/8"	300#	0.45
2530246-3	3"	1/2"-13	2-7/16"	300#	0.55
2530246-4	4"	1/2"-13	3"	300#	0.95

TWO-SCREW SPLIT RING HANGER

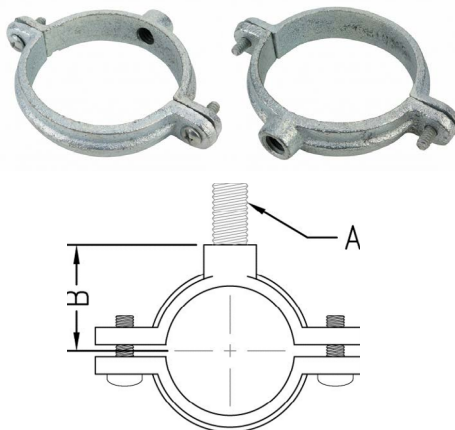

Item #	Pipe Size	Rod Size	B	Maximum Load Capacity (LBS)	Weight (LBS)
2530245-3/8	3/8"	3/8"-16	13/16"	180#	0.13
2530245-1/2	1/2"	3/8"-16	7/8"	180#	0.14
2530245-3/4	3/4"	3/8"-16	1"	180#	0.16
2530245-1	1"	3/8"-16	1-1/8"	180#	0.18
2530245-1-1/4	1-1/4"	3/8"-16	1-5/16"	180#	0.22
2530245-1-1/2	1-1/2"	3/8"-16	1-7/16"	180#	0.38
2530245-2	2"	3/8"-16	1-11/16"	180#	0.44
2530245-2-1/2	2-1/2"	1/2"-13	2-1/8"	300#	0.45
2530245-3	3"	1/2"-13	2-7/16"	300#	0.55
2530245-4	4"	1/2"-13	3-11/32"	300#	0.70

System No.		Location		Spec Section		Paragraph	
Submitted By		Date		Approved		Date	