BEAM CLAMP
MALLEABLE IRON

FUNCTION:

Designed for attaching hanger rod to the top flange of a beam or bar joist, where the flange thickness does not exceed 3/4 inch (19.05mm). The open U design permits rod adjustment.The universal design of the 3/8" allows it to be used in an inverted position on the bottom flange of a beam as well.

MATERIALS:

Malleable iron with hardened steel cup point set screw.

FINISH:

- Electro-Galvanized
- Plain

*Recommended Nut Tightness: 35-75 inch pounds.

c UL us LISTED
FM APPROVED
APPROVED UL/FM for up to 1/2" Size

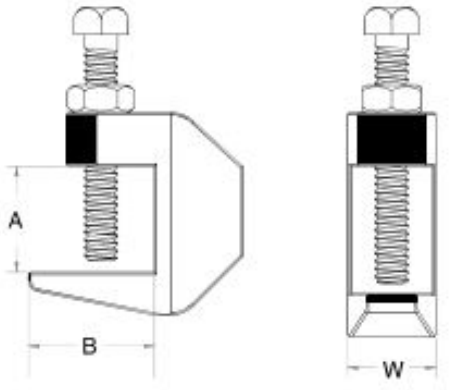

	ITEM #	ROD SIZE	MAX LOAD TOP	MAX LOAD BOTTOM	WEIGHT	A	B	W
c UL us LISTED FM APPROVED	2550050	3/8"	500 lbs	250 lbs	0.33 lbs	3/4"	1-1/16"	7/8"
	2550050Z	3/8"	500 lbs	250 lbs	0.33 lbs	3/4"	1-1/16"	7/8"
c UL us LISTED FM APPROVED	2550055	1/2"	950 lbs	760 lbs	0.34 lbs	3/4"	1-1/8"	1-1/16"
	2550055Z	1/2"	950 lbs	760 lbs	0.34 lbs	3/4"	1-1/8"	1-1/16"
	2550056	5/8"	950 lbs	760 lbs	0.63 lbs	3/4"	1-1/8"	1-1/16"
	2550056Z	5/8"	950 lbs	760 lbs	0.63 lbs	3/4"	1-1/8"	1-1/16"

*** Reversible design approved for bottom beam use.**

System No.		Location	
Submitted By		Date	

Spec Section		Paragraph	
Approved		Date	